



## SRX 725

DATASHEET

### THREE WAY SPEAKERS

#### DESCRIPTION

Passive 2X15" Portable Two-Way Utility Stage Loudspeaker System  
The STI PS 2X15" is a portable, double fifteen-inch, two-way speaker system designed for either main sound reinforcement or monitoring applications. It is perfect for speech reinforcement of any type, live performance stage monitoring, reinforcement of vocal and acoustic music, and as a high-performance satellite speaker for use with subwoofers. PS passive speakers were designed to provide the sensitivity, frequency response and power handling needed for almost any professional audio environment while still being reasonably priced. Whether you use a powered mixer or an equipment rack full of amps and signal processing, PS passive speakers deliver the sound power and bandwidth necessary to make loud music sound natural and even quiet speech intelligible.






## SRX 725

DATASHEET

### THREE WAY SPEAKERS

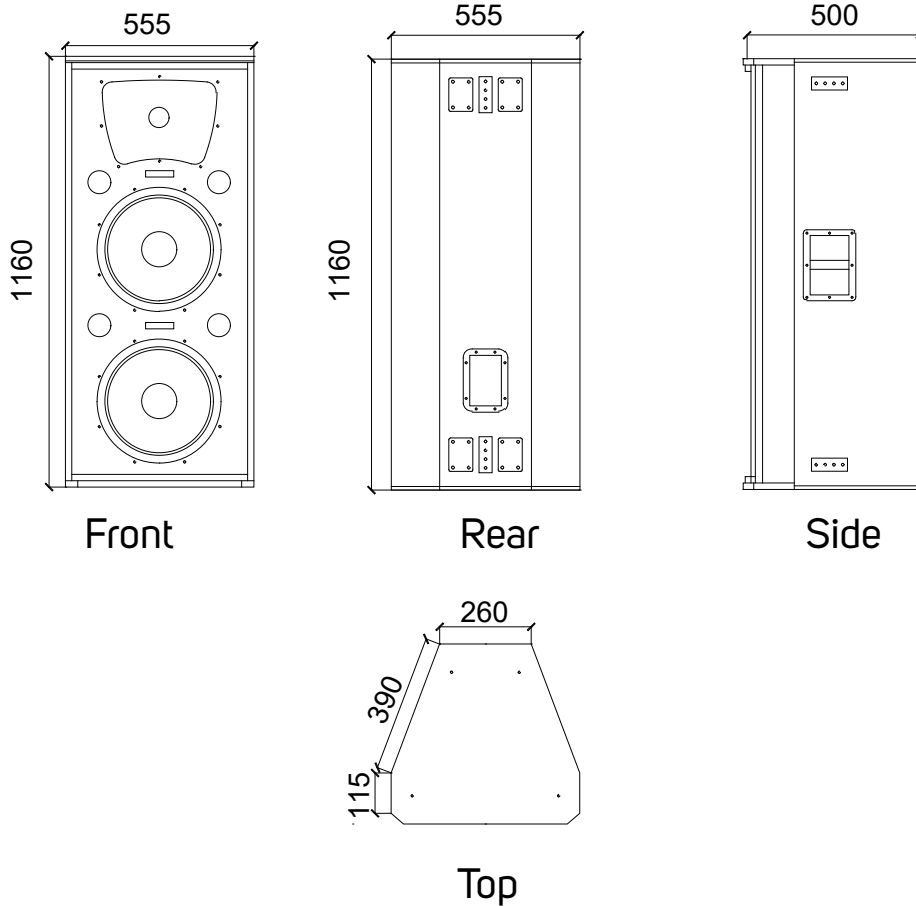

Frequency Responce	45Hz-18Khz
Impetoce	4 Ohms
RMS	1200/2400W
Peak Power Handling	4800W
Directivity Angle	H90°x V10°
Sensitivity	101dB (2,83v/m)
Maximun SPL	128dB
Woofers	2x15" (380mm)
Tweeter	3" (75mm)
Size	1160x555x500mm
Weight	53kg

